(19) World Intellectual Property **Organization**

International Bureau





(43) International Publication Date 7 July 2005 (07.07.2005)

PCT

(10) International Publication Number WO 2005/061755 A1

(51) International Patent Classification⁷: 14/30, 14/34, 14/06, 14/08, 14/16, 30/00

C23C 14/56,

(21) International Application Number:

PCT/SE2004/001870

(22) International Filing Date:

15 December 2004 (15.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0303596-1

23 December 2003 (23.12.2003)


- (71) Applicant (for all designated States except US): SAND-VIK AB [SE/SE]; S-811 81 Sandviken (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): STIGENBERG HULTIN, Anna [SE/SE]; Stjärngatan 9, S-811 52 Sandviken (SE). SCHUISKY, Mikael [SE/SE]; Mossvägen 25 C, S-811 34 Sandviken (SE). ISAKSSON, Ulrika [SE/SE]; Stjärngatan 16, S-811 52 Sandviken (SE).

AHLGREN, Mats [SE/SE]; Källparksvägen 19, S-187 67 Täby (SE).

- (74) Agent: MELIN, Linda; Sandvik AB, Group Staff Intellectual Property, S-811 81 Sandviken (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A STAINLESS STEEL STRIP COATED WITH A DECORATIVE LAYER

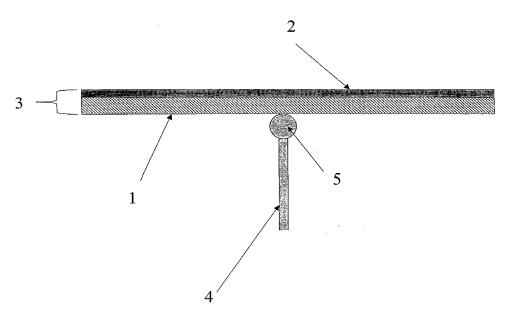

(57) Abstract: The invention relates to a coated stainless steel strip (1) product with an evenly distributed layer (2) on one side or both sides of said strip. Said layer has a decorative appearance, the thickness of said layer is maximally 10 µm, the tolerance of said layer is maximally +/- 30 % of the layer thickness, the parameter value of L*, a* b* is respectively 0< L* <95, -66< a* <64, -90<b* < 70, the tolerance of said decorative appearance as expressed in terms of ΔE is maximally 15 and the layer has such a good adhesion so that the coated steel strip when tested in soft-annealed condition can be bent more than 90° over a radius (5) maximally equal to 5*t, where t is the thickness of said strip, without showing any tendency to flaking or the like.

WO 2005/061755 A1



Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.